

# INSTALLATION INSTRUCTIONS

## WALTHER CREED

**ATTENTION:** USE ALWAYS EYE GLASS PROTECTION WHEN INSTALLING AND UNINSTALLING THE DPM RECOIL SYSTEM



1. Recoil Rod   2. Assembling Tool   3. Short/Soft External Spring  
4. Medium (Gold) External Spring   5. Long/Heavy External Spring



**FIG. 1**


1. Choose one of the DPM external springs and install it on the recoil rod. Insert the assembling tool from the front side of the slide hole. (FIG. 1)

**FIG. 2**




Insert the edge of the spring in the tip of the assembling tool. (FIG. 2)

**FIG. 3**

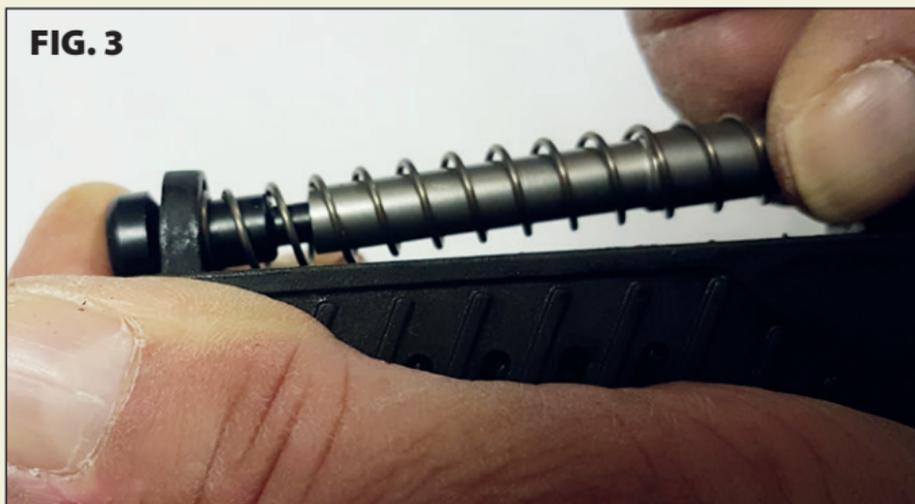


Hold the assembling tool firmly with your index finger on the slide hole. Then push the recoil rod so the tip of the assembling tool to be fully inserted in the rod. (FIG. 3)

**FIG. 4**

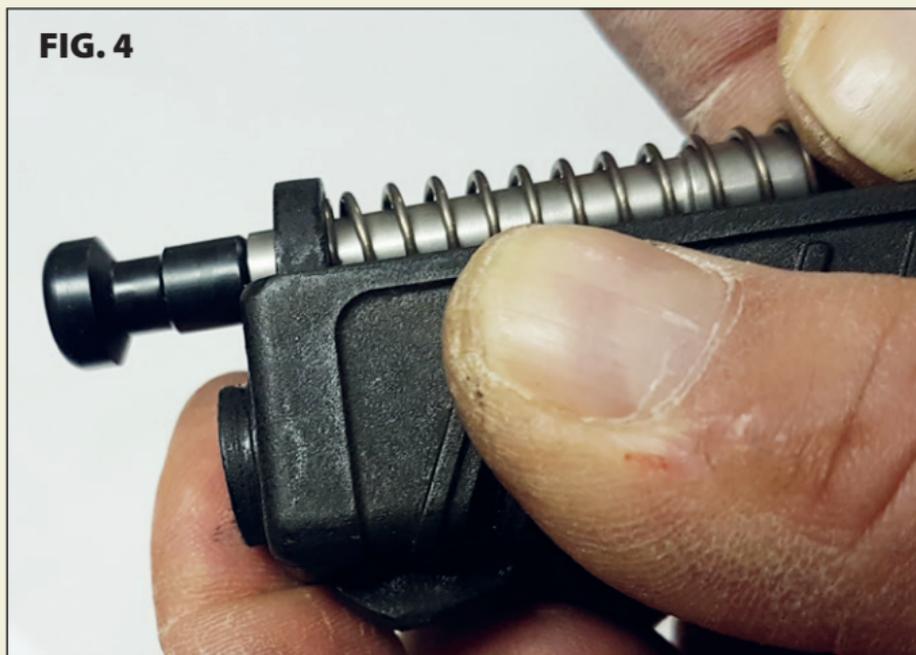

Release the assembling tool and push until the recoil rod passes a little from the slide hole. (FIG. 4)

**FIG. 5**

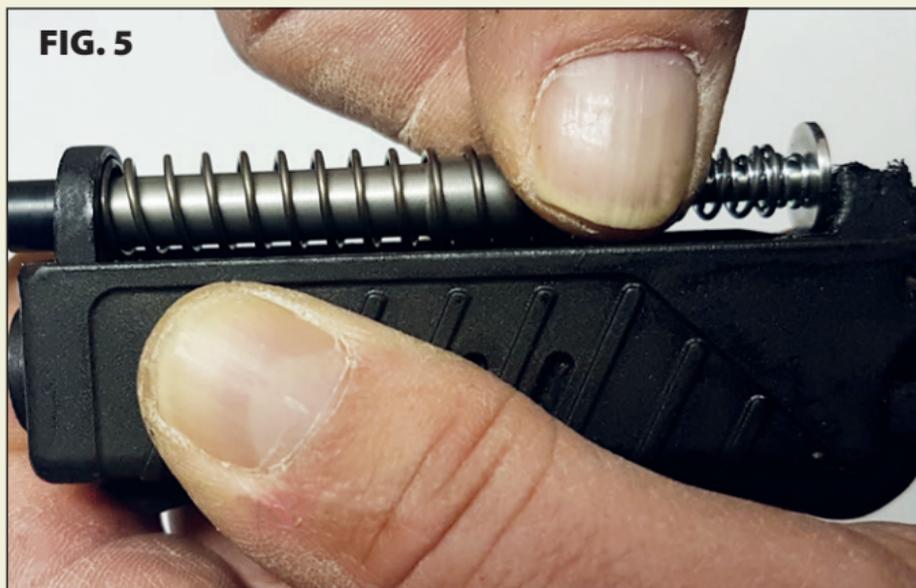

Align the recoil rod and let it sit on the barrel rod position. (FIG. 5)



**Remove the Assembling Tool. (FIG. 6)**



**Assemble the pistol and rack the slide a few times to check for any unseen interferences and to ensure that the DPM Recoil Reduction System is placed correctly and operates unrestricted. (FIG. 7)**

For any Questions about the Installation or Operating instructions:  
[service@dpmssystems.com](mailto:service@dpmssystems.com) | [www.dpmssystems.com](http://www.dpmssystems.com)